



MARK	HISTORY	DATE	NAME
1	Preliminary Release	Jan-09-2015	姚广平

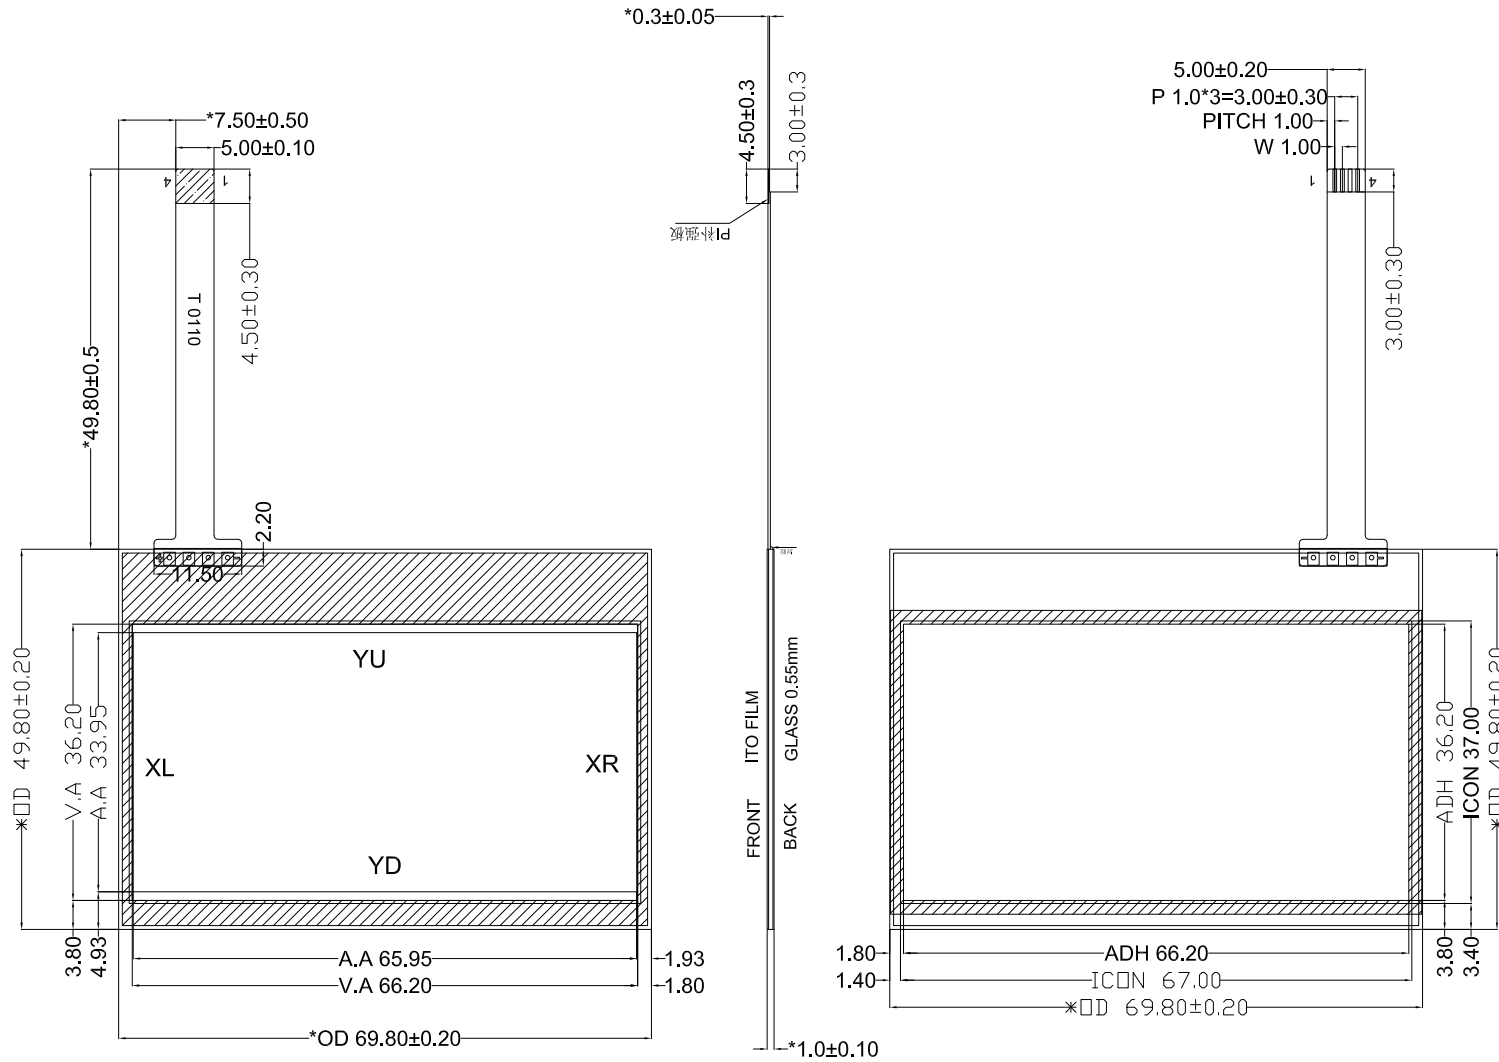

Notes:

- Type: film+glass+FPC
Film: Matte screen (0.188mm)
- Operating Voltage: DC 3V 1mA
- Operation Temperature: -20°C ~ 70°C
Storage Temperature: 30°C ~ 80°C
- Connect Material: FPC
- Response Time: ≤30ms
- Linearity: ≤1.5%
- Transmittance: ≥80%
- Surface Hardness ≥3H (Pencil)
- operation force: ≤100g
- Resistance:
(ITO Film)x: 200Ω ~ 700Ω
(ITO Glass)y: 300Ω ~ 900Ω
- Unspecified Tolerance: ±0.20
- ROHS Standard



PIN	WIRING
1	XR
2	YU
3	XL
4	YD

Double Adhesive Tape Thickness=0.15mm

 EastRising buydisplay.com	EastRising Technology Co.,Ltd 旭日东方科技有限公司	 CD
		UNIT: MM SIZE: A4
PART NUMBER: ER-TP028-1		REV: A0
DRAWN BY :JIM	CHECKED BY :JAVEN	APPROVED BY : TONY